


ZME_UZB1

This USB Stick connects a PC or any other computing platform with USB interface to a wireless Z-Wave network. To use the UZBs functions a Z-Wave controller software supporting the standard Sigma Designs Serial API for Z-Wave device is required. This software plus this UZB realize a static controller to manage and use Z-Wave devices of various vendors. This stick works with all certified Z-Wave devices regardless of its vendor or date of origin. The Sigma Designs Serial API specification is available to all owners of a Sigma Designs Z-Wave SDK.

The device implements a virtual serial interface used by the Z-Wave application. Linux and Mac OSX has a built in device driver for the stick and will create a new device named like `/dev/cu.usbmodemfa131` (OSX) or `/dev/ttyACM0` (Linux). Windows enumerates a new COM device but may require a device driver `uzb.inf` available at www.z-wave.me.

Wireless capabilities:

This Z-Wave transceiver uses the SRD frequency range of 865-870 MHz. It complies to the Standard EN 300 220 1/2. The TX power is limited to +2 dBm. The antenna characteristics shows more or less circular radiation field. However using the device right on a notebook or other heavy device may partially degrade the signal significantly. Applying an USB-USB extender cable of min. 10 cm will always provide the best radio experience.

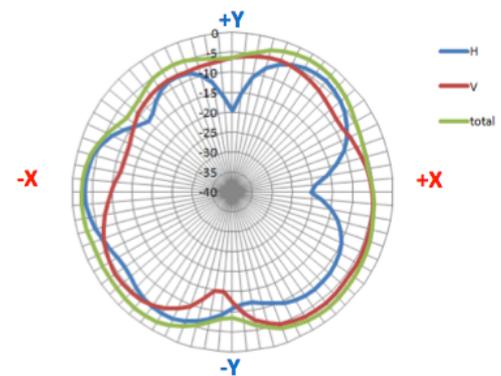

Technical Data:

- Dimensions and weights: 30x14x6 mm, 3 gr
- Transceiver Hardware Platform: Mitsumi WML-C84
- USB:
 - o VID/PID: 0658/0280
 - o Z-Wave Role: Static Controller
 - o Z-Wave SDK: 6.51.03 (Z-Wave Plus)
- Wireless Transceiver:
 - o Antenna: Helix
 - o Frequencies: 865 ... 870 MHz
 - o TX Power: +2 dBm
 - o RX sensitivity: -104 dBm (9.6kbps) ... -95 dBm (100kbps)
 - o Wireless Range: up to 100 m in open field, > 40 m in rooms

