




Smart switch "GOLI", the beginning of smart light & smart life, creates click-away, comfortable environments.

Major functions include:

- Lights-ON/OFF- Manually operated
 - Device
- Wire-less, remote control
 - Lights-ON/OFF through Applications
- Wire-less automatic control
 - Lights-ON/OFF through timer-setting
 - Checks for individual/whole buttons status and electricity consumption



Product overview

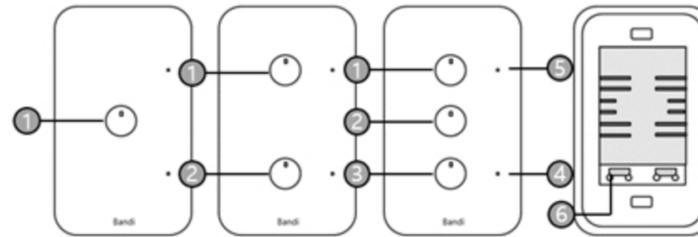


1- button switch 2- button switch 3- button switch Rear

- 1-button : Light connected to point #1 ON/OFF
- 2-button : Light connected to point #2 ON/OFF
- 3-button : Light connected to point #3 ON/OFF
- Reset button : Device restart
- Status LED
- Wiring connect terminal

Wiring terminal

Wirings for ON/OFF switches



- *1-button : Wiring terminal for 1st light ON/OFF
- *2-button : Wiring terminal for 2nd light ON/OFF
- *3-button : Wiring terminal for 3rd light ON/OFF
- *COM : Common line connector

How to Use GOLI

-Connecting Device with Smart home hub-TalkZ
-Removal of Device from Smart home hub-TalkZ
Either connecting or removal is possible by gently pressing the top button on each device

- Smart home app> Add device> Light> Bandi switch tap
- Press button for 3 seconds; Status LED flashes when the device is connected
- Press the button again for 3 seconds to remove the device. When the device is removed Status LED flashes
- Product reset : Keep holding Top button, after 10seconds, it will start factory reset. All variables will be initialized to default values. All the lamps will be turned off


*Use "Product reset" procedure only in the event that the network primary controller is missing or otherwise inoperable.

*"Connecting Device" means connect the device into the Z-Wave network.

*"Removal of Device" means remove the device from the Z-Wave network

ASSOCIATION

The BDS-301Z supports one Group with five Nodes for lifeline communication. Group 1 must be assigned the Node ID of the controller to which unsolicited notifications from the BDS-301Z will be sent. The Z-Wave controller should set this association automatically after inclusion. You can associate up to five Z-Wave devices to Group 1. Lifeline association only supports the "manual reset" event. For instructions on how to "set lifeline association" please refer to your wireless controller instructions.

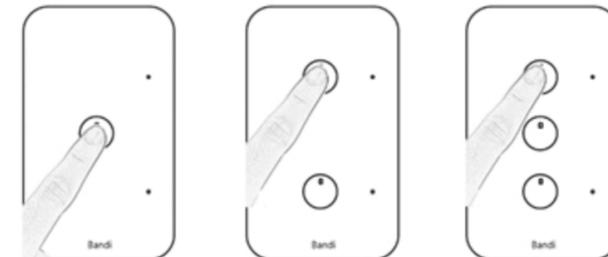

Safe Use

Important!

- 1-button switch is for 30W ~ 150W.
- Both 2-button switch and 3-button switch are for 10W~200W.
- Check if 1-button connected light works when the device doesn't work following installation.

Cautions for user

- Do not either open or re-assemble the device in order to avoid failure of operations and any danger.
- Do not use water and/or any chemicals, like alcohol or benzene, to clean the device.
- Pay attention not to cause shock to the device.

Cautions for pre-installations

- Make sure that the circuit breaker is shut down before installations start.
 - Make sure that the exposed wiring terminal is not exposed to materials even after the circuit breaker is shut down.
- * Either electric shock or fire can be caused by user's carelessness.

Cautions for installations

- Read the user's manual prior to installations and follow the instructions in the manual.
- Inappropriate installations may cause technical errors and incident.
- Rain water, oil, dust and direct sunlight may cause electric shock, electrical short and fire and other errors.
- Strictly use the rated power source for the device. If the power source is not accordance with the rated power, malfunction and/or failure of operations can take place.
- Pay attention not to damage the device while in transport and installations.
- Any damages caused by user's mishandling and dismantled device can not be guaranteed.

Specifications

Category	Description
Dimensions(mm)	67 x 113 x 45
Power supply	220V, 60Hz, 3A
Interface	Analogue
Communication protocol	Z-Wave 919.7Mhz
Operating temperatures	-10°C ~ 40°C
Valid distance for operating	Up to 40m

Button type	Recommended Current Capacity (Raed Load Capacity)		
	1-contact	2-contact	3-contact
1-button	30W~150W	X	X
2-button	30W~150W	10W~200W	X
3-button	30W~150W	10W~200W	10W~200W

Warranty

- Any technical breakdowns while in normal operating and/or manufacturing defects within the warranty period of one year are covered.
- Below are user's responsibilities and free of charge repairs and replacement are not guaranteed if :
 - Errors, breakdowns, and/or malfunctions are caused by user's misuse.
 - Errors, breakdowns and/or malfunctions result from natural disasters such as fire, flooding, earthquake and/or lightning)
 - Errors, breakdowns and/or malfunctions are caused by an-authorized service agent
- Either warranty or compensation is not applicable if :
 - user modifies the device at user's choice
 - any human/physical incident occurs as result of user's modification against the device

Warranty for the Product

The Warranty period is 1(One) year following purchase.

Name of Product	Smart switch GOLI
Model	BDS-101Z, 201Z, 301Z
Period of warranty	1(One)Year
Date of purchase	M / D / Y