

FCC / IC

En

This device complies with Part 15 of the FCC and Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC NOTE: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Important note: To comply with the FCC RF exposure compliance requirements, no change to the antenna or the device is permitted. Any change to the antenna or the device could result in the device exceeding the RF exposure requirements and void user's authority to operate the device.

Fr

Cet appareil est conforme au paragraphe 15 des normes FCC et au CNR pour les appareils exempts de licence d'Industrie Canada. Son utilisation est sujette aux deux conditions suivantes : 1) cet appareil ne doit pas occasionner de brouillage préjudiciable et 2) cet appareil doit accepter toutes les interférences reçues, notamment les interférences qui peuvent provoquer un fonctionnement non désiré.

NOTE DE LA FCC : Le fabricant n'est pas responsable des interférences sur les fréquences radioélectriques ou télévisuelles pouvant être causées par des modifications non autorisées de ce matériel. De telles modifications peuvent annuler le droit de l'utilisateur d'utiliser cet appareil.

REMARQUE : Cet appareil a été testé et certifié conforme aux limites relatives aux appareils numériques de catégorie B définies dans le paragraphe 15 des normes FCC. Ces limites ont été définies afin de fournir une protection raisonnable contre le brouillage préjudiciable en milieu résidentiel. Cet appareil produit, utilise et peut émettre des ondes de fréquence radio et, s'il n'est pas installé et utilisé conformément aux instructions, il peut provoquer un brouillage préjudiciable aux communications radio. Il n'existe toutefois aucune garantie que des interférences ne se produiront pas ou sans d'une installation donnée. Si cet appareil occasionne un brouillage préjudiciable à la réception radiophonique ou télévisuelle, il suffit d'ajuster et d'éteindre l'appareil pour déterminer sa responsabilité. Nous encourageons l'utilisateur à essayer de corriger ces interférences en appliquant une ou plusieurs des mesures suivantes :

- Reorienter ou déplacer l'antenne de réception.
- Augmenter la distance entre l'appareil et le récepteur.
- Brancher l'appareil à une prise secteur différente de celle du récepteur.
- Consulter le revendeur ou un technicien spécialisé en postes radio ou téléviseurs.

Remarque importante : Pour se conformer aux exigences de conformité de la FCC concernant l'exposition aux RF, aucune modification apportée à l'antenne ou au dispositif n'est autorisée. Toute modification apportée à l'antenne ou au dispositif pourrait faire en sorte que le dispositif dépasse les exigences d'exposition aux RF et pourrait annuler le droit de l'utilisateur d'utiliser ce dispositif.

Es

Este dispositivo cumple con las Especificaciones del apartado 15 de las normas de la FCC y con las especificaciones de las normas radioeléctricas (RSSI) del Ministerio de Industria de Canadá aplicables a aparatos exentos de licencia. El funcionamiento está sujeto a los siguientes dos condiciones:

(1) Este dispositivo no debe provocar interferencia perjudicial, y (2) este dispositivo debe aceptar toda interferencia que pueda, incluso la que pudiera causar un funcionamiento no deseado.

NOTA DE LA FCC: El fabricante no se hace responsable de ninguna interferencia de radio o TV ocasionada por modificaciones no autorizadas efectuadas a este equipo. Dichas modificaciones podrían anular la autoridad del usuario para utilizar el equipo.

NOTA: Este equipo ha sido probado y cumple con los límites para aparatos digitales de Clase B, de conformidad con el apartado 15 de las normas de la FCC. Estos límites están diseñados para proveer protección razonable contra interferencias perjudiciales en una instalación residencial. Este equipo genera, usa y puede irradiar energía de radiofrecuencias y, si no se instala y usa según las instrucciones, puede provocar interferencia perjudicial a las radiocomunicaciones. No obstante, no hay garantías de que no ocurrirá interferencia en una instalación en particular. Si este equipo provoca interferencia perjudicial a la recepción de radio o televisión, lo que puede determinarse encendiendo y apagando el equipo, se recomienda que el usuario intente corregir la interferencia por medio de la implementación de una o más de los siguientes medidas:

- Reorientar o reubicar la antena receptora.
- Incrementar la separación entre el equipo y el receptor.
- Conectar el equipo a un tomacorriente de un circuito diferente del circuito al que está conectado el receptor.
- Consultar al distribuidor o a un técnico con experiencia en radio/televisión para solicitar asistencia.


Nota importante: Para cumplir con los requisitos de cumplimiento de exposición de radiofrecuencia de la FCC, no se permiten cambios a la antena o el dispositivo. Cualquier cambio a la antena o dispositivo podría hacer que el dispositivo supere los requerimientos de exposición de radiofrecuencia y anular la autoridad del usuario para operar el dispositivo.

FCC — UZZZW45306 | IC: 6924A-ZW5306
Jasco Products Company | Model: ZW5304/34172
CAN ICES-3(B)/NMB-3(B)

16
All brand names shown are trademarks of their respective owners.
Tous les noms de marque illustrés sont des marques de commerce de leurs propriétaires respectifs.
Todos los marcos que aparecen aquí son marcas registradas de sus respectivos dueños.

17
MADE IN CHINA/FABRIQUÉ EN CHINE/HECHO EN CHINA
GE IS A TRADEMARK OF GENERAL ELECTRIC COMPANY AND IS UNDER LICENSE BY JASCO PRODUCTS COMPANY LLC, 10 E. MEMORIAL RD., OKLAHOMA CITY, OK 73114.
©JASCO 2018 | 34172 | ZW5304 | 08/29/18 PM v1


MANUAL • MANUEL • MANUAL

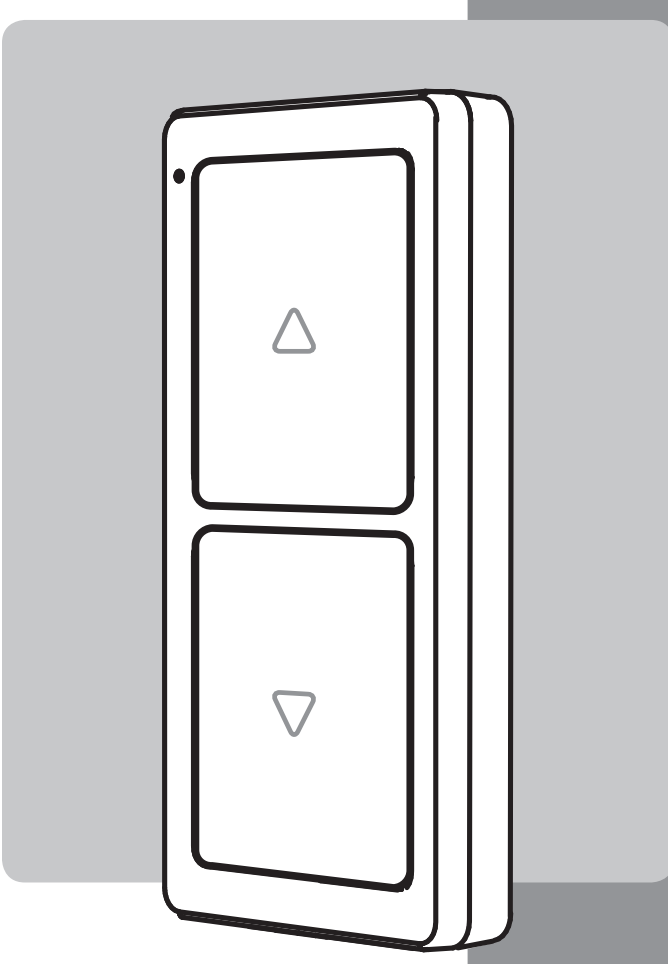

Portable Wireless
Solo Scene
Remote

Concentrateur à distance
Portable

Remoto concentrador
Portátil



Z-Wave® Certified Wireless Lighting Control
Certifié Z-Wave® Commande d'éclairage sans fil
Control inalámbrico para iluminación certificado por Z-Wave®

ezzwave.com
34172
ZW5304

DO NOT RETURN THIS PRODUCT TO THE STORE
NE RETOURNEZ PAS CE PRODUIT AU MAGASIN
NO DEVUELVA ESTE PRODUCTO A LA TIENDA

If you have any problems or questions, contact our tech support team at 1-800-654-8483, (option 1) Monday-Friday, 7AM-8PM CST.

For the most up-to-date product support, accessories, electronic (PDF) format manuals and more, visit www.bjjasco.com/support.

- No user serviceable parts in this unit.

Si vous avez des problèmes ou des questions, communiquez avec notre équipe de soutien technique au 1-800-654-8483, option 1, du lundi au vendredi, de 7 h à 20 h (HNC).

Pour le soutien relatif aux produits le plus à jour, les accessoires, les manuels en format électronique (PDF) et plus encore, visitez le site www.bjjasco.com/support.

- Aucune des pièces de ce dispositif ne peut être réparée par l'utilisateur.

Si tiene problemas o dudas, comuníquese con nuestro equipo técnico al número: 1-800-654-8483, opción 1 de lunes a viernes, de 7 a.m. a 8 p.m., hora estándar del centro (CST).

Para recibir el soporte técnico más actualizado sobre productos, accesorios, manuales en formato digital (PDF), entre otros, visite www.bjjasco.com/support.

- Esta unidad no contiene piezas que el usuario pueda reparar.

WARNING

NOT FOR USE WITH MEDICAL OR LIFE-SUPPORT EQUIPMENT

Z-WAVE ENABLED DEVICES SHOULD NEVER BE USED TO SUPPLY POWER TO OR CONTROL THE ON/OFF STATUS OF MEDICAL AND/ OR LIFE-SUPPORT EQUIPMENT.

ADVERTENCIA

SE PROHIBE SU EMPLEO EN EQUIPO MÉDICO O EQUIPO PARA EL MANTENIMIENTO DE LAS FUNCIONES VITALES

LOS DISPOSITIVOS Z-WAVE NUNCA SE DEBEN USAR PARA SUMINISTRAR ENERGÍA ELÉCTRICA AL EQUIPO MÉDICO O AL EQUIPO PARA EL MANTENIMIENTO DE FUNCIONES VITALES, NI PARA CONTROLAR EL ESTADO DE ENCENDIDO O APAGADO DE DICHOS EQUIPOS.

AVERTISSEMENT

NE PAS UTILISER AVEC UN ÉQUIPEMENT MÉDICAL OU DE SURVIE

LES DISPOSITIFS COMPATIBLES AVEC LA TECHNOLOGIE Z-WAVE NE DEVRAIENT JAMAIS ÊTRE UTILISÉS POUR ALIMENTER OU COMMANDER LA MISE EN MARCHÉ OU L'ARRÊT DE L'ÉQUIPEMENT MÉDICAL OU DE SURVIE.

Requires 2 CR2032 coin cells.
Observe polarity markings (+), (-).

Se necesitan 2 pilas CR2032.
Respetar las indicaciones de polaridad (+), (-).

CAUTION

- BATTERIES MAY LEAK HARMFUL LIQUIDS OR IGNITABLE MATERIALS OR EXPLODE CAUSING INJURY AND PRODUCT DAMAGE.
- DO NOT MIX OLD AND NEW OR OTHER BATTERY TYPES.
- REPLACE ALL BATTERIES AT THE SAME TIME.
- REPLACE EXHAUSTED BATTERIES IMMEDIATELY.
- REMOVE BATTERIES IF PRODUCT IS TO BE UNUSED FOR EXTENDED PERIODS OF TIME.


PRECAUCIÓN

- LAS PILAS PUEDEN PERDER LÍQUIDOS PERJUDICIALES O MATERIALES INFLAMMABLES, O BIEN EXPLOTAR Y CAUSAR LESIONES CORPORALES Y DAÑOS EN LOS PRODUCTOS.
- NO COMBINE PILAS USADAS Y NUEVAS, NI TIPOS DE PILAS DISTINTAS.
- REEMPLACE TODAS LAS PILAS AL MISMO TIEMPO.
- REEMPLACE LAS PILAS AGOTADAS DE INMEDIATO.
- EXTRAIGA LAS PILAS SI NO UTILIZA EL PRODUCTO DURANTE PERIODOS EXTENDIDOS.

Requiert deux piles CR2032
Observez les symboles de polarité (+), (-).

MISE EN GARDE

- LES PILLES PEUVENT LIBÉRER DES PRODUITS NOCIFS OU DES SUBSTANCES INFLAMMABLES. ELLES PEUVENT ÉGALEMENT EXPLOSER ET CAUSER DES BLESSURES OU DES DÉGÂTS MATÉRIELS.
- NE PAS MÉLANGER DES PILLES NEUVES AVEC DES PILAS USAGÉES OU DES PILLES DE TYPES DIFFÉRENTS.
- REEMPLACER TOUTES LES PILLES EN MÊME TEMPS.
- REEMPLACER IMMÉDIATEMENT LES PILLES ÉPUISÉES.
- RETIRER LES PILLES DANS L'ÉVENTUALITÉ D'UNE LONGUE PÉRIODE DE NON-UTILISATION.

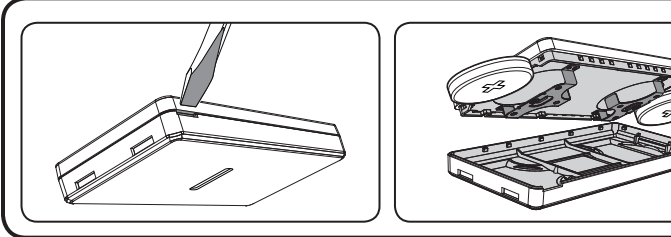

WARRANTY

JASCO Products warrants this product to be free from manufacturing defects for a period of two years from the original date of consumer purchase. This warranty is limited to the repair or replacement of this product only and does not extend to consequential or incidental damage to other products that may be used with this product. This warranty is in lieu of all other warranties, expressed or implied. Some states do not allow limitations on how long an implied warranty lasts or permit the exclusion or limitation of incidental or consequential damage, so the above limitations may not apply to you. This warranty gives you specific rights, and you may also have other rights which vary from state to state. Please contact Customer Service at 800-654-8483 (option 1) between 7AM – 8PM CST or via our website (www.bjjasco.com) if the unit should prove defective within the warranty period.

GARANTEE

JASCO Products garantit que ce produit est exempt de tout défaut de fabrication pour une période de deux ans à compter de la date de l'achat original par l'acheteur. Cette garantie se limite exclusivement à la réparation ou au remplacement de ce produit et n'est pas applicable aux dommages indirects ou accessoires survenus sur d'autres produits utilisés avec ce produit. Cette garantie se substitue à toute autre garantie expresse ou implicite. Certains États ne permettent pas de restrictions quant à la durée d'une garantie implicite ou permettent l'exclusion ou la limitation des dommages indirects et accessoires, il se peut, par conséquent, que cette garantie ne s'applique pas dans votre cas. Cette garantie vous confère des droits juridiques précis; vous pouvez avoir d'autres droits qui peuvent varier d'un État à l'autre. Veuillez communiquer avec le service à la clientèle au 1-800-654-8483 (option 1) entre 7 et 20 h heure normale du Centre ou par l'intermédiaire de notre site web (www.bjjasco.com) si l'appareil s'avère défectueux au cours de la période de garantie.

GARANTÍA

JASCO Products garantiza que este producto está libre de defectos de fabricación durante un periodo de dos años a partir de la fecha original de compra por parte del consumidor. Esta garantía se limita a la reparación o sustitución de este producto solamente y no se extiende a daños derivados o accidentales causados a otros productos que se usen con esta unidad. Esa garantía reemplaza a todas las demás garantías expresas o implícitas. Algunos estados no autorizan limitaciones en cuanto a la duración de una garantía implícita ni permiten la exclusión o limitación por daños accidentales o derivados, por lo tanto, puede que las anteriores limitaciones no apliquen en su caso. Esta garantía le da a usted derechos específicos, y otros que usted puede tener y que varían según el estado en el que usted reside. Si la unidad resultare defectuosa dentro del periodo de garantía, comuníquese por favor con Atención al Cliente en el 800-654-8483 (opción 1) entre 7 y 20 h. Hora del Centro, o a través de nuestro sitio de internet (www.bjjasco.com).

JASCO Products Company LLC, Building B
10 E. Memorial Rd. Oklahoma City, OK 73114.

SPECIFICATIONS
ZW5304
Battery Operated: 2x CR2032 Lithium 3V Battery
Signal (Frequency): 908.4/916 MHz
Range: Up to 150ft. line of sight between the wireless controller and the closest Z-Wave receiver module.
Operating Temperature Range: 32-104° F (0-40° C)
For indoor use only
Specifications subject to change without notice due to continuing product improvement.

ESPECIFICACIONES
ZW5304
Battery Operated: 2x CR2032 Lithium 3V Battery
Signal (Frequency): 908.4/916 MHz
Range: Up to 150ft. line of sight between the wireless controller and the closest Z-Wave receiver module.
Operating Temperature Range: 32-104° F (0-40° C)
For indoor use only
Specifications subject to change without notice due to continuing product improvement.

Configuration

Standard configuration (default, single cast without ACK):

- Press and release the UP arrow 3 times quickly
- Then press and release the DOWN arrow 1 time quickly
- LED flashes 3 times indicating configuration is set

Alternate configuration (single cast with ACK):

- Press and release the DOWN arrow 3 times quickly
- Then press and release the UP arrow 1 time quickly
- LED flashes 3 times indicating configuration is set

Controller - Basic documentation

The device does nothing if it receives a basic command.

Documentation for association command class

Group identifier:

- Group 1: Lifeline

Maximum number of devices that can be added to the group:

- Maximum number of devices = 1

Description of how the association group is used and/or triggered by the product:

- Lifeline
- COMMAND_CLASS_BATTERY, BATTERY_REPORT
- COMMAND_CLASS_DEVICE, RESET_LOCALLY, DEVICE_RESET_LOCALLY, NOTIFICATION

1.

Getting to know your new Z-Wave device

- No wiring necessary
- Ideal for remote control of a single scene
- The scene on the controller can be associated with up to 20 select Z-Wave-compatible devices.
- Uses a standard, decorative-size wallplate for single-gang installations (wallplate included) or can be used with multi-gang wallplates for a seamless appearance next to your existing switch.
- Z-Wave certified for simple pairing and integrated home automation.

2.

A. LED

B. Buttons

- Press and release the button to turn ON the Scene's controlled device.
- Press and release the button to turn OFF the Scene's controlled device.
- Press and hold the button to brighten the Scene's controlled device.
- Press and hold the button to dim the Scene's controlled device.

C. Battery Tray Notch

3.

Programing your remote

Before you start programming your remote, determine your needs from the list below to get started in the right spot.

Adding a Scene Controller to an exiting Z-Wave hub - See Section A

OR

Use without a hub as a standalone controller - See Section B

OR

Adding a Scene Controller to another standalone controller - See ezzwave.com/support or call our tech support team

Confused? Need help with setup? Call our tech support team at 1-800-654-8483 (Option 1) Monday-Friday, 7AM-8PM CST to help walk you through the setup process.

4.

SECTION A - Adding a Scene Controller to an existing Z-Wave hub

Including Scene Controller to Hub/ Primary Controller (Learn Mode)

This will copy the network and device information from your existing hub/primary controller to the scene controller, making it a secondary controller.

- Following the manufacturers guidelines to place your existing primary controller or hub into inclusion mode.
- Press and hold the and buttons for three (3) seconds. The LED will slowly flash every second.
- Press and hold the for three seconds. The LED will flash for ten (10) seconds.
- Press and release the button to set the device as a receiver. The LED will slowly flash every second. If network transfer was successful, the LED will turn on for two (2) seconds.

Adding devices to Scene Controller

This step will add devices to a Scene button. You must complete all steps in this box within 20 seconds or the controller will time out. Please familiarize yourself with these steps before you begin programming.

- Press and hold the and buttons for three (3) seconds. The LED will slowly flash every second.
- Press and release the button. The LED will quickly flash for 20 seconds.
- Locate the manual/program button on the Z-Wave module/switch you are adding to the scene controller. Follow the instructions for your Z-Wave device to add it to the scene (same as adding to a hub). The LED will quickly flash.
- Using the manual/program button on the module/switch, adjust the light to your desired level of brightness. The LED will quickly flash.
- Press and release the button to exit programming. The LED will turn on for two (2) seconds.

Controlling devices once they have been added to a Scene

- Press and release the button to turn ON the Scene's controlled device(s).
- Press and release the button to turn OFF the Scene's controlled device(s).
- Press and hold the button to brighten the Scene's controlled device(s).
- Press and hold the button to dim the Scene's controlled device(s).

SECTION B - Use without a hub as a standalone controller

Adding devices to Scene Controller

This step will add devices to a Scene button. You must complete all steps in this box within 20 seconds or the controller will time out. Please familiarize yourself with these steps before you begin programming.

- Press and hold the and buttons for three (3) seconds. The LED will slowly flash every second.
- Press and release the button. The LED will quickly flash for 20 seconds.
- Locate the manual/program button on the Z-Wave module/switch you are adding to the scene controller. Follow the instructions for your Z-Wave device to add it to the scene (same as adding to a hub). The LED will quickly flash.
- Using the manual/program button on the module/switch, adjust the light to your desired level of brightness. The LED will quickly flash.
- Press and release the button to exit programming. The LED will turn on for two (2) seconds.

Controlling devices once they have been added to a Scene

- Press and release the button to turn ON the Scene's controlled device(s).
- Press and release the button to turn OFF the Scene's controlled device(s).
- Press and hold the button to brighten the Scene's controlled device(s).
- Press and hold the button to dim the Scene's controlled device(s).

Additional controls

To return your remote to factory defaults

Note: All Z-Wave device connections and scenes will be lost in the reset. If the controller is setup as the primary controller after performing a reset, each Z-Wave device that was previously in the network will need to be individually reset or excluded from the network before it can be included again. The steps for resetting and reconnecting each smart device differ, please refer to the device manufacturer for reset instructions. If this controller is being used as a secondary controller in the network, use this procedure to reset this controller only in the event that the network primary controller is missing or otherwise inoperable.

- Press and hold the and buttons for three (3) seconds. The LED will slowly flash every second.
- Press and hold the button for three (3) seconds. The LED will quickly flash three (3) times.
- Press and release the button. The LED will flash three (3) times if successful.

5.

Installing remote beside existing switch

- Remove wallplate from existing switch.
- Screw the remote bracket assembly onto new wallplate that will be used (not included).

NOTE: Use provided 1/4" low-profile mounting bracket screws.

- Place the wallplate assembly onto the existing switch and secure with existing wallplate screws.

Installing remote with single wallplate

Bracket design will work with standard electrical boxes and low-voltage mud rings.

- Using the supplied 1" screws, secure the mounting bracket to the box.
- Place the wallplate onto the mounting bracket and secure with provided 1/4" low-profile mounting bracket screws.

WARNING: Ensure any unconnected wires are capped with wire nut.

Mounting remote on wall mount

The wall mount bracket is magnetic and will hold the remote in place. Gently place the remote on top of the bracket using the alignment bar to center the remote.