

manual

Motion sensor

Item: 51111

EN

NO

SV

CLEVERIO
SMARTHOME


www.cleverio.se
Box 50435, Malmö, Sweden
2019-03-19



ENGLISH

Specifications

Battery	1x CR123A
Protocol	Z-Wave Plus
Detection distance	1.5 - 9 M
Detection angle	90°
Size	65x65x28.5 mm

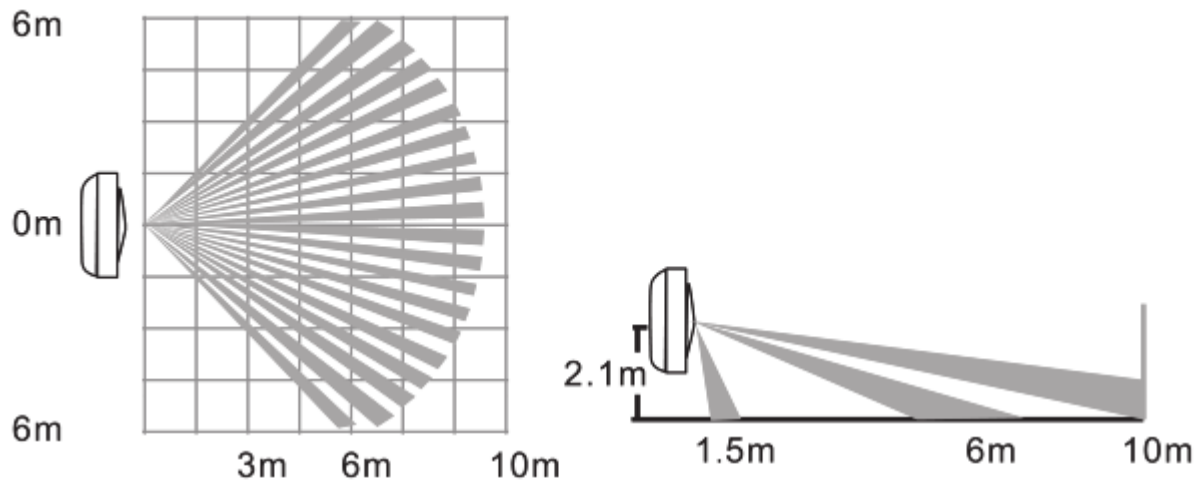

Placement

The sensor must be attached at at least 2.1 m height to be able to detect motion properly. The mounting plate can either be attached with screws or the included 3M tape.

Device ADD for Inclusion

- Press Func_Button 3 time in the motion sensor, Green LED is Blinking 3 times within 1 second.
- If Inclusion Process is successful, Green LED will turn off.

Device Remove for Exclusion

- Press Func_Button 3 times quickly.
- If Exclusion Process is successful, Green LED is Blinking 6 times, then turn off.

Device Factory Reset

- Long press Func_Button while installing batteries

- Device Reset Locally notification is Transmitted
- Please use this procedure only when the network primary controller is missing or otherwise inoperable.

Safety information

Exhausted batteries are to be removed and replaced by a correct type battery.

Dispose of used batteries according to the instructions.

Association & Association Group Information

- Lifeline between controller and the motion sensor
- Supported command classes
 - : Battery report, Notification report, and Device Reset Locally notification
- Maximum supported nodes are 5
- Association Group description
 - >>Association group 1: Lifeline association group
 - Include command class: Battery report, Notification report, and Device Reset Locally notification, Binary report.
 - >>Association group 2: Root Device group(Binary Sensor)
 - Binary Sensor Command Class: Compatible with 300 series.

- 1–Report status of people passing by, no people passing by, tamper alarm and tamper recovery via lifeline.
- 2– When the Device detects new event of people passing by or no people passing by, tamper alarm and tamper recovery, the device will be triggered.

>>Association group 3: Root Device group(Notification)

- 1–Report status of people passing by, no people passing by, tamper alarm and tamper recovery through lifeline.
- 2– When the Device detects new event of people passing by or no people passing by, tamper alarm and tamper recovery, the device will be triggered.