



## GETTING STARTED WITH SMARTEE

# INDEX

## Chapter 1: Installing your Smartee

Using a TV.....	03
Without using a TV.....	04

## Chapter 2: Setting up your space

Set up your space using your mobile app.....	05
Set up your space using your Web app.....	06

## Chapter 3: Getting to know your Smartee

Top & Bottom Menu.....	07
Settings Menu.....	08

## Chapter 4: Adding devices

Previous considerations .....	09
Add Devices using Webee TV app.....	10
Add Devices using Webee mobile app.....	11
Add Devices using Webee Web app.....	13

## Chapter 5: Webee functionalities

Webee Functionalities... ..	14
-----------------------------	----

## Chapter 6: Z-Wave functionalities

Description of Z-Wave console.....	15
Adding Z-Wave devices to Smartee.....	16
Controlling multichannel Z-Wave devices.....	17
Removing Z-Wave devices from Smartee.....	18
Removing Z-Wave devices using the developer console.....	19
Entering to the Learn Mode.....	21
Smartee Command Class Support.....	21

# 1 INSTALLING YOUR SMARTEE

Your Smartee can be setup in different ways according to your preferences. Find below the instructions to set it up either using your TV, directly on your mobile App or using a web application.


## CONNECTING TO YOUR TV

Smartee comes with a cool Air Mouse but any regular mouse will work as well just by plugging it to the USB port.



3

! Red and Blue lights means out of battery or USB dongle is not connected.

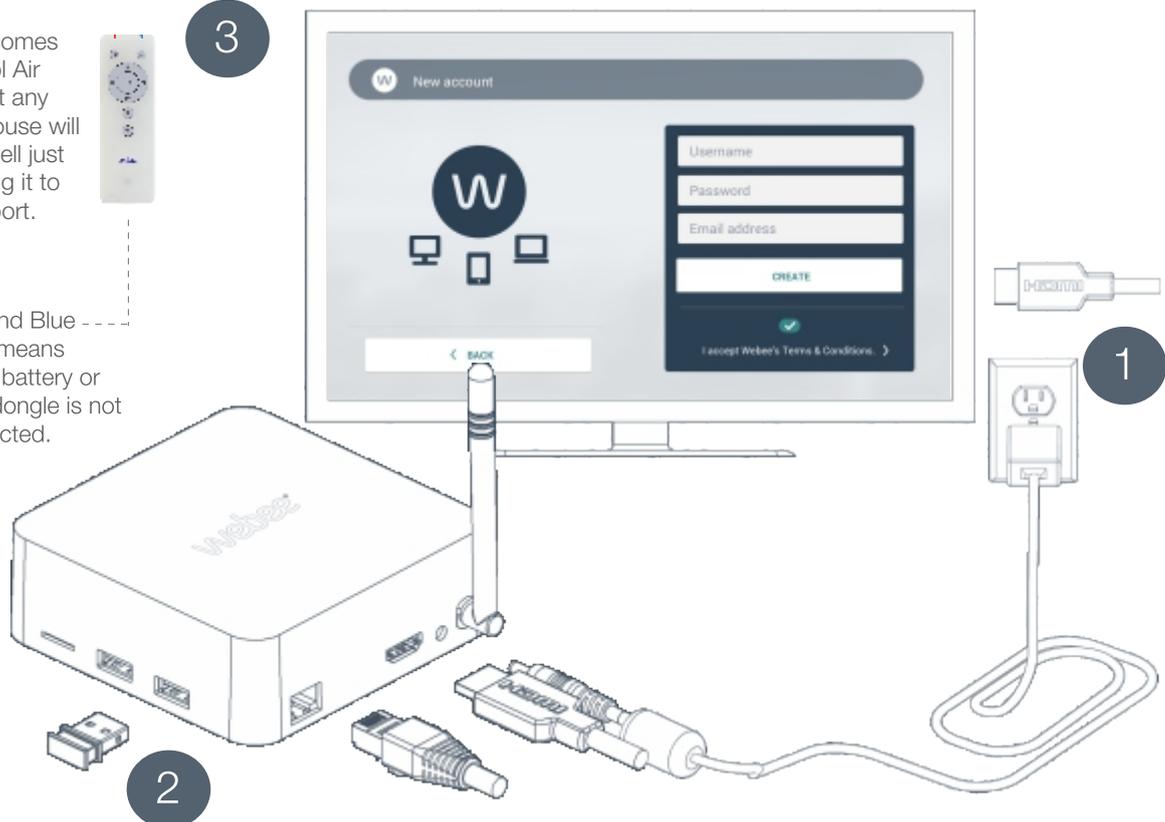

### 1 PLUG THE WEBEE HUB

Use the power source to plug the Smartee into the electrical outlet, and connect it to the TV using the HDMI cable.

### 2 CONNECT THE AIR MOUSE

Insert the USB dongle into the hub. If the led on the mouse is blinking red and blue, use the USB cable to charge it directly from the hub.

### 3 FOLLOW SMARTEE WIZARD TO CONNECT TO INTERNET AND COMPLETE THE SET UP

Follow the instructions on the screen to connect the hub to internet using WiFi or Ethernet, and follow the steps to create your account. Once the setup is completed, navigate the device console to start adding them to the system.

4 **DOWNLOAD THE WEBEE APP TO CONTROL YOUR SMART HOME SYSTEM FROM ANYWHERE**



**Mobile App**


Download it from the App Store or Google Play.



**Web App**

Access [my.webeelife.com](http://my.webeelife.com) from your browser and control your home using your computer.

**WITHOUT USING A TV**

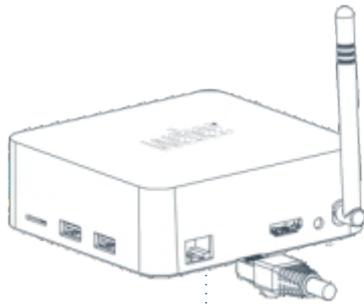

Ethernet .....

1 Connect the hub to Internet using an Ethernet cable.



2 Download the Webee app from the App Store or Play Store on a mobile device and follow the instructions.


## 2 SETTING UP SPACES

Spaces are a way to group your devices and control them with your Smartee through your Webee app. You can create a Space when setting up your Smartee on the TV. Or check the following instructions to do it using your mobile or web app.


### SET UP YOUR SPACE USING THE MOBILE APP



1- Download the Webee app from the App Store or Play Store. Register and Log-in to your Webee account.

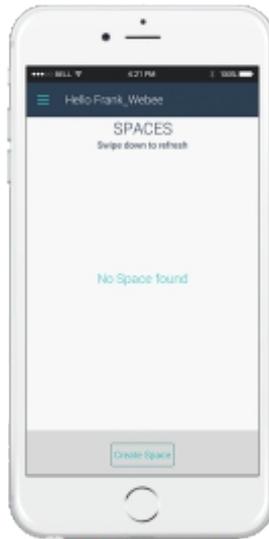


2- Create your Space. Spaces allow you to group and control your devices with your Webee app.

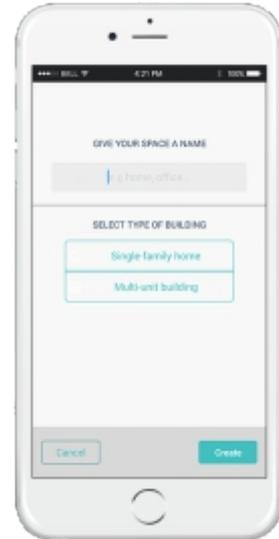


3- Name your Space and select your type of building.



3- Add your Smartee to your Space.

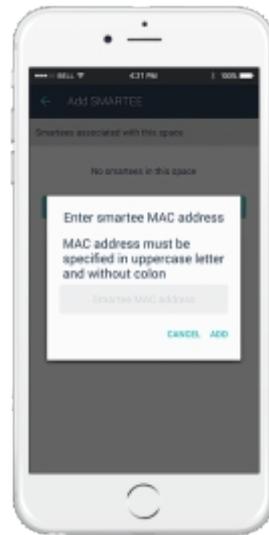

4- Enter your Smartee MAC address. Find it on a sticker in the back of your hub.

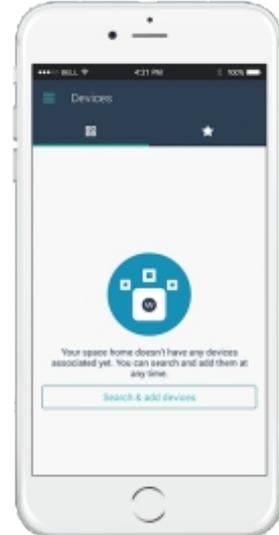

5- Access your Space and start adding devices. Learn more on page 11.


**SET UP YOUR SPACE USING THE WEB APP**




1- On your browser type my.webeelife.com Register (Sign up) to create an account or sign in.




2- Create your Space. Spaces allow you to group and control your devices with your Webee app.

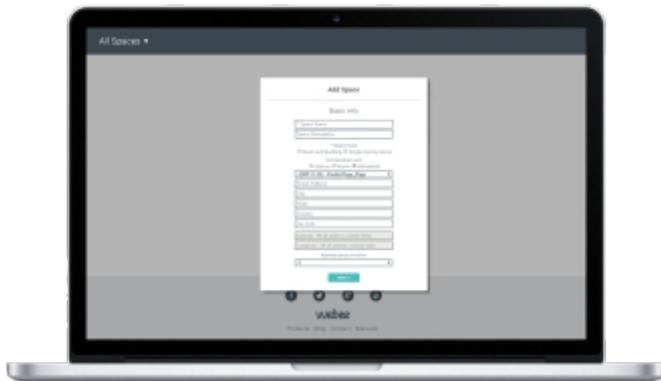


3- Name and configure your Space settings.

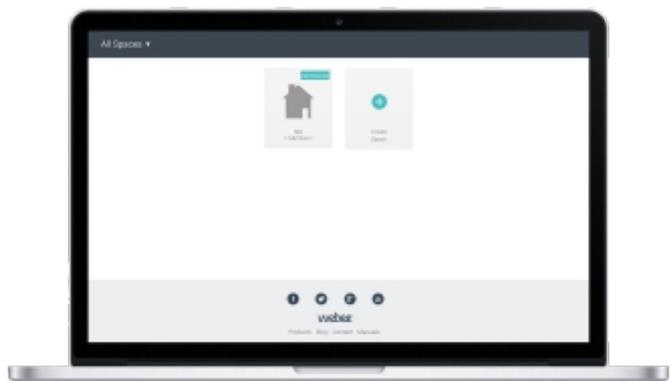

4- Add your Smartee to your Space.

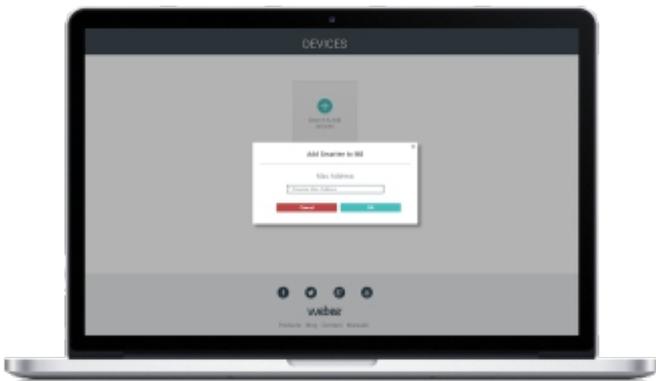

5- Enter your Smartee MAC address. Find it on a sticker at the back of your hub. Make sure to use all capital letters and no spaces or colons.

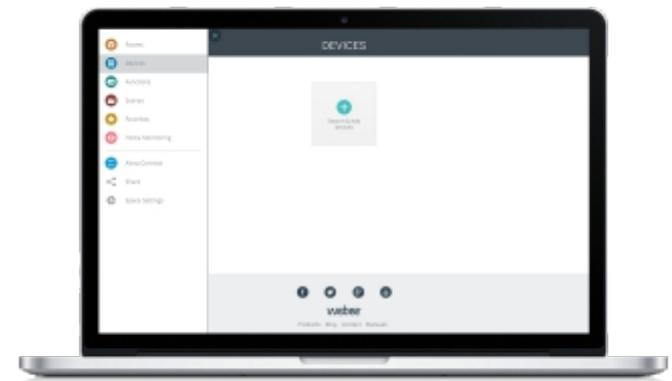


6- On the menu, navigate to the Devices section to start adding devices. Learn more on page 13.


### 3 GETTING TO KNOW YOUR SMARTEE

#### Top menu

Access to control your smart devices.

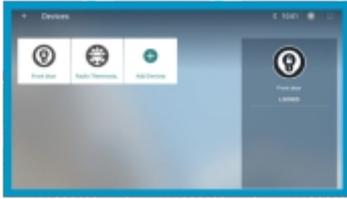


Access to configure your Home Monitoring settings.

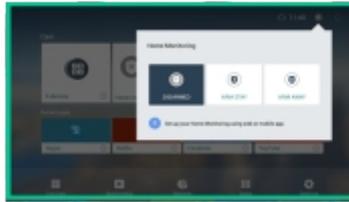


Access to check extended one week weather.




#### Bottom menu

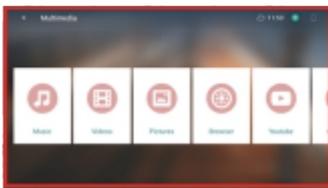

Access all multimedia functionalities.

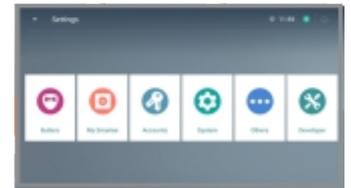

Access to Settings. Learn more on page 8.

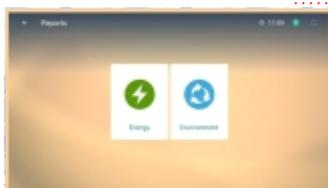


Access to Energy and Environment reports.




Access to all applications.

GETTING TO KNOW YOUR SMARTEE


Settings menu

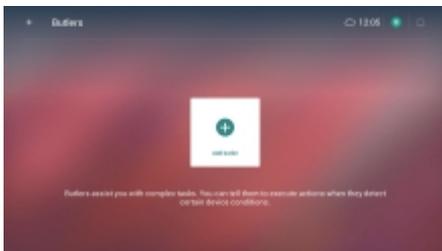


 **Butlers:** Automate your devices to run on their own.

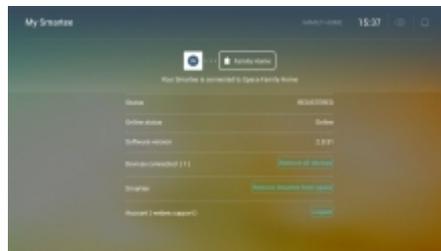


 **My Smartee:** Check your Smartee status such as current version and connection.

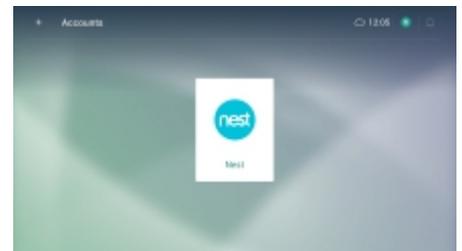


 **Accounts:** Direct access to your device's accounts.

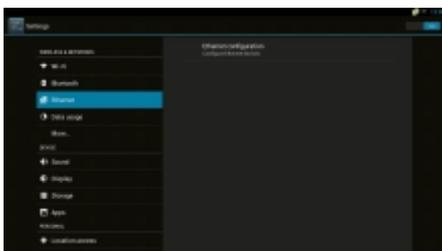

 **System:** Smartee general configuration.

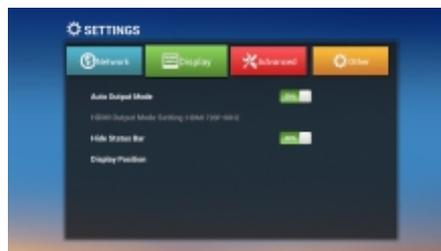

 **Others:** Smartee advance configuration.

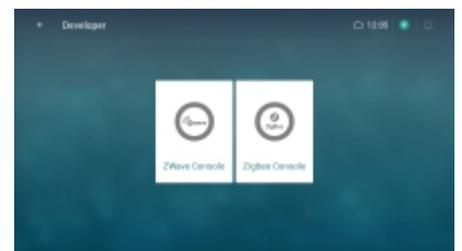

 **Developers:** Access to Z-Wave and Zigbee consoles.

## ADD DEVICES USING WEBEE TV APP



1- On your Welcome screen, select Devices on the bottom menu.



3- Tap to Add Devices. Smartee will search and add the devices around.



4- Once the devices is added, tap on it to edit and control it.




5- Rename your devices and send different commands to perform. . You can automate devices to run on their own by creating Scenes and Butlers. Learn how, accessing the tutorials on our support section [webeelife.com/support](http://webeelife.com/support).

## 4 ADDING DEVICES

### PREVIOUS CONSIDERATIONS

The Smartee SM2001 Webee \*Hub communicates with smart devices using different communication protocols such as Z-Wave, ZigBee, WiFi. Verify device compatibility by visiting our support section at [webeelife.com/support](http://webeelife.com/support).

You can add and control devices from your TV, your mobile app or Web app. To add a device to Smartee follow this instructions:

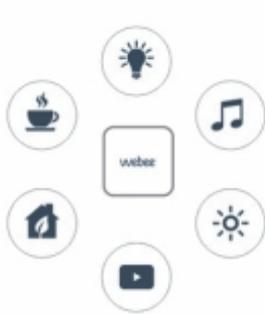

1- Move the device closer to the hub for the pairing process.

2- Prepare the device to join the network (inclusion mode). See instructions on each device user manual.

3- Press the Search & Add devices button on the Smartee Webee app to open the network.


4- Smartee will automatically find and add the devices around.

Note: If the device has already joined a different network, follow the manufacturer guideline to reset it to join Smartee network.


On this chapter learn how to add devices using your different Webee apps.

\*Webee Smartee Sm2000 ZigBee WiFi hub wont support Z-Wave devices. Please contact us at [support@webeelife.com](mailto:support@webeelife.com) to help you set it up.

**ADD DEVICES USING WEBEE MOBILE APP**

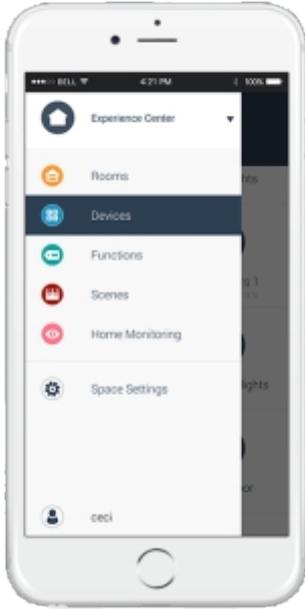

1- On your mobile app navigate to the device section on the left menu.

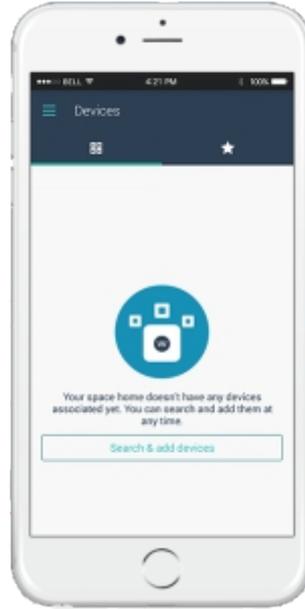


2- Tap to add devices. Smartee will search and automatically add the devices around.



3- Tap on the device to edit and control it.



4- On the device screen, tap on the small pencil to edit.

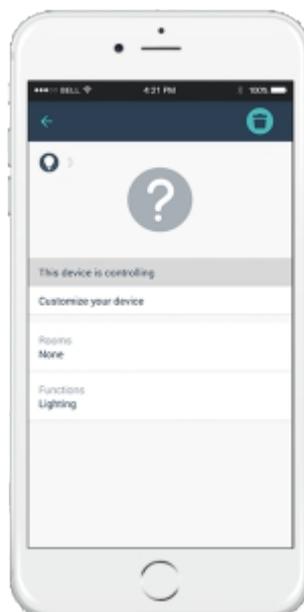


5- Tap on Customize your device.




6- Choose your device type, rename it and add a picture to easily identify it.

\*You can mark any device as favorite by tapping on the star on the top right corner, and access all of your selected devices navigating to the favorite section on the main menu


**ADD DEVICES USING WEBEE MOBILE APP**

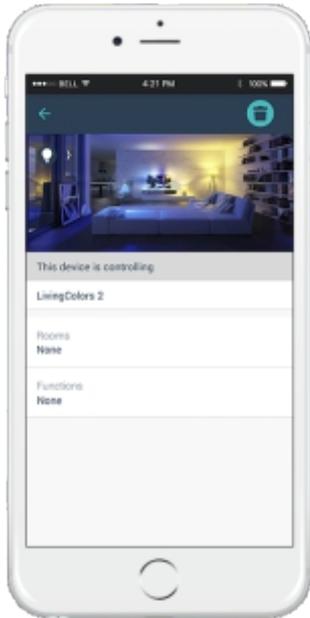


7- You can group your devices by Functions and Rooms.

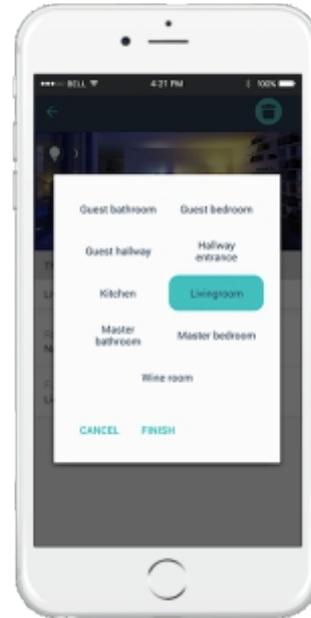

8- Tap on Rooms to assign your device to a room. You can access all the devices grouped in each room by navigating to the Room section on the main menu.

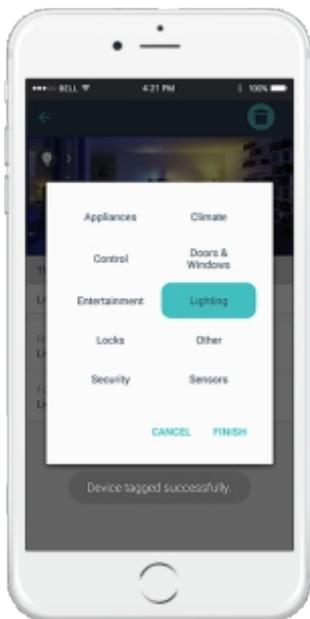


9- Tap on Functions to assign your device to a Function. You can access all the devices grouped on each function by navigating to the Function section on the main menu.

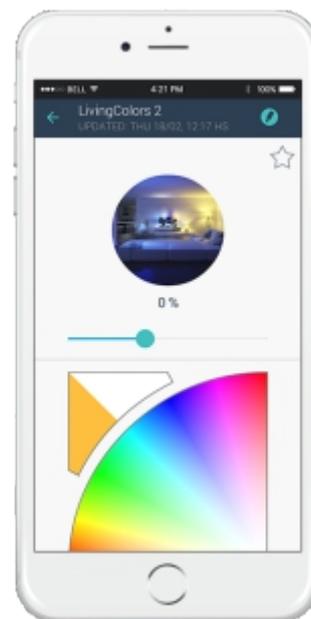


10- Control the device manually or automate your devices to run on their own by creating Scenes and Butlers. Learn how to use this features by accessing the tutorials on the support section [webeelife.com/support](http://webeelife.com/support).


## ADD DEVICES USING WEBEE WEB APP

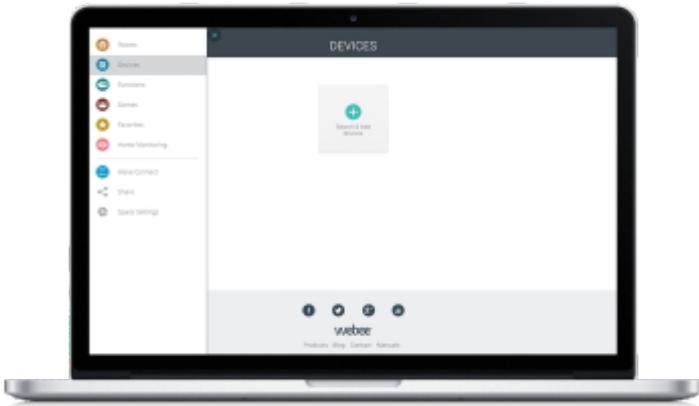


1- Access your Space and Navigate to the devices section, Click to add devices.

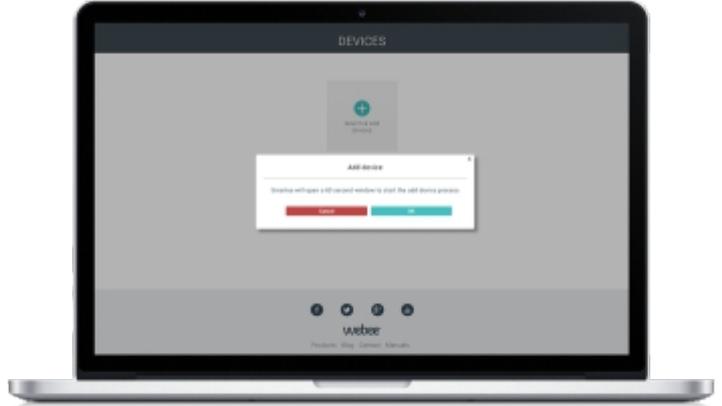


2- Smartee will start searching for the devices around.

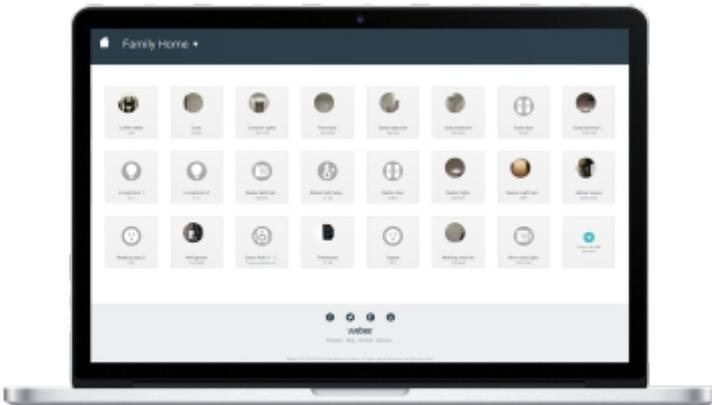

3- Smartee will add the devices around.

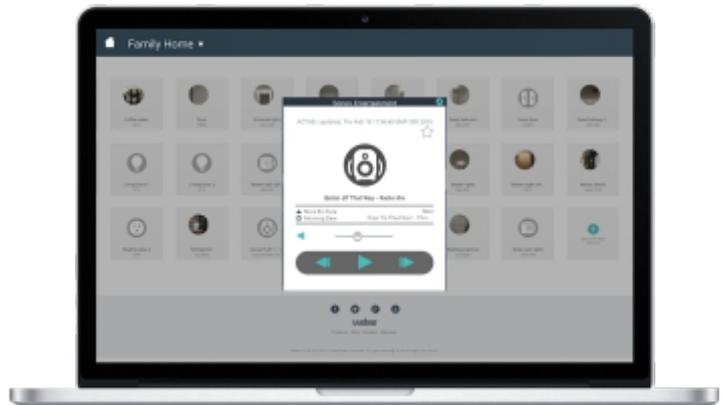

4- Once the devices is added, tap on it to edit and control it.

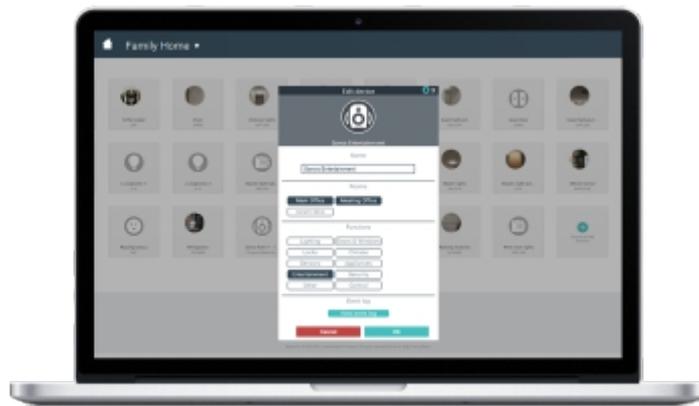

5- Rename your devices and send commands for the device to perform. You can automate your devices to run on their own by creating Scenes and Butlers. Learn how accessing the tutorials on our support section [webeelife.com/support](http://webeelife.com/support).

## 5 Webee app functionalities



### Functions

Classify devices according to their function using tags like climate, security, and others.



### Rooms

Group and organize devices in different rooms and grant different accesses to each user.



### Scenes

Schedule devices to execute actions automatically at the same time. For example, create "Away Scene" to lock doors and turn off main lights when you leave for work.



### Butlers

Configure devices to trigger actions when an specific activity is detected, such as turning on lights during night time if motion is detected inside home.

Access [webeelife.com/tutorials](http://webeelife.com/tutorials) to learn how to configure these functionalities on your Webee app.

## 6 Z-Wave FUNCTIONALITIES



Z-Wave is an Interoperable two-way RF mesh networking technology designed for use with a Z-Wave gateway/ controller and other Z-Wave enabled devices.

The Smartee is a Z-Wave static controller. It can be included in any Z-Wave network regardless of the manufacturer. All non-battery operated nodes within the network will act as repeaters regardless of vendor to increase reliability of the network. You can access all Z-Wave functionalities on Smartee using the developer console.

### Description of Z-Wave Console



1- On the Home Screen menu of your Webee TV app select Settings,



2- Navigate to the Developer section.



3- Access your Z-Wave console.



4- The Z-Wave console contains 3 panels:  
**Left Panel:** Is a scrollable panel that shows the Z-Wave devices added to the Z-Wave network of the Smartee.

**Center Panel:** Shows information and control of any selected device.

**Right Panel:** Is a scrollable panel and contains all the controller commands related to Z-Wave network management and basic control of Z-Wave devices.



## Adding Z-Wave devices to Smartee using the developer console.

In this section you will find specific information on how to work on Z-Wave control using the developer console. This will allow you to access Z-Wave specific functionalities, such as detecting defective Z-Wave devices, or removing devices from the Z-Wave network. Check chapter 3 to add and control Z-Wave devices the regular way.



1-Tap on “Add Device” on the right panel for normal power inclusion or “NW Inclusion” for Network Wide Inclusion.  
 2- Press the Z-Wave button on your device to add it (refer to device user manual).

2-After a new device is detected, it will appear on the left side panel.  
 4-If the device was successfully added to the Smartee, all the device information will be at the center panel.



3-If the inclusion process fails, when selecting the device this message will appear: “The new device was not successfully added. Please, remove it and try again”. In this case follow the remove device instruction and try again.



## Multichannel Z-Wave devices

Z-Wave devices that presents more than one functionality, run each one through different channels and each channel can be control individually. When adding a multichannel device to Smartee you will be able to control and get the state of each channel on your Z-Wave device page. See below:



- 1- For on-off power strips, you will get one control line per channel
- 2- In order to get the device fully synchronized with your Smartee, after inclusion process you must press each on-off control line.



## Removing Z-Wave devices from Smartee

Below are the steps to remove Z-Wave devices from your Smartee. This will remove the devices from your Space and you will not longer be able to control them using the Webee app once they are removed.



1- On your Welcome screen, select Devices on the bottom menu.



2- Find the Z-Wave devices that you would like to remove.



3- Click to remove the Z-Wave device.



4- Confirm. This will remove your device from your space but it will remain connected to your Z-Wave network. To completely remove your device from your Smartee follow the next steps.




## Removing Z-Wave devices from Smartee using the developer console.

Below are the steps to remove Z-Wave devices from Smartee. Z-Wave network. This will allow you to add the Z-Wave devices to a different Z-Wave network once are removed.



1- On the Home Screen menu of your Webee TV app, select Settings, then navigate to the Developer section to access the Z-Wave console

2-Tap on “Remove Device” located on the right.

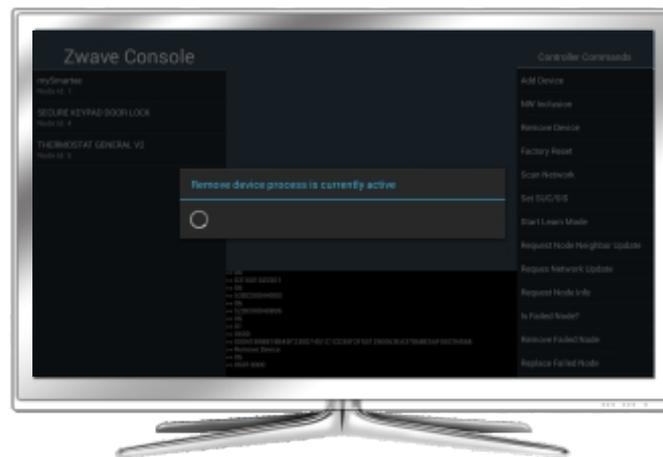

3- There will be a 20 seconds time period for you to run the commands indicated on your Z-Wave device’s manual to complete the remove operation.





## Smartee Command Class Support:

- ▶ **Basic Command Class Support:**  
The Smartee does not map the Basic Command Class to any functionality. It ignores Basic Get requests.
  
- ▶ **Association Command Class Support:**  
The Smartee support Association Command Class. It has one association group ("Lifeline" group), only one device can be associated to this group. The Smartee will send reset notifications to the associated device when the hub is factory reset.
  
- ▶ **Security Command Class Support:**  
The Smartee is a Security-enabled device. When a security-enabled Z-Wave device is added to the hub's network, its secure communication will be 128-bit AES encrypted.

V1.0 REV. July 2016

