

# User manual for roller shutter ARZ Z-Wave

## Contents

1. Safety standards .....	2
2. Description .....	3
3. Programming the appliance.....	4
4. Association Groups.....	5
5. Compatibility of other producers' appliances in Z-Wave. ....	5
6. Z-Wave configuration parameters.....	5
7. Alarms and Notifications.....	5
8. Technical parameters.....	6
9. Command classes.....	6
10. Manufacturer Specific Report.....	6
11. Description of signals - light-emitting diode (LED).....	6
12. Warranty.....	8

**FAKRO Sp. z o.o.**  
ul. Węgierska 144A  
33-300 Nowy Sącz  
Polska  
[www.fakro.com](http://www.fakro.com)  
tel. +48 18 444 0 444  
fax. +48 18 444 0 333

---

## 1. Safety standards

**Please carefully read the instructions below before installing the awning to avoid electric shocks, laceration, etc.**

- While installing the electric roller shutter it is essential to comply with the following rules:
- Firstly, after unpacking, check that the roller shutter does not show any signs of mechanical damage.
- Installation should be performed by a qualified person according to the producer's user manual.
- Before connecting the roller shutter, make sure that the supporting voltage is compatible with the voltage of the roller shutter mentioned on the rated plate.
- Connect the roller shutter and launch one cycle of work to verify whether it works correctly (dual-core wire - 15V DC).
- Plastic containers used for packing should be kept out of children's reach as they pose a potential threat.
- The roller shutter should be used only for its purpose. FAKRO is not responsible for any damage of the roller shutter resulting from improper use.
- Any actions related to cleaning, adjusting or disassembling of the electric awning should be preceded by disconnecting the power supply.
- Do not use any solvent-like agents, or a water jet (do not dip in water).
- All repairs should be made by a service authorized by the producer.
- The roller shutter is for external use only.


## 2. Description

ARZ Z-Wave roller shutters are only for external installation with Fakro roof windows. They are compatible with Fakro wireless remote controls or other remote controls marked with the Z-Wave logo produced by other companies. roller shutters are equipped with a two-way module of radio communication. Z-Wave uses 868,42 MHz radio waves.

The ARZ Z-Wave roller shutter has three extremes:

- maximum extension (encoder maximum position)
- completely rolled up (encoder minimum position)
- current limiting protecting roller shutter against damage and user against accidental injury resulting from the contact with moving elements of roller shutter.

In order to use the appliance, it is essential to install it in accordance with the figure manual attached to its package. Programming should be done with any of the remote controls available from Fakro or any remote controls equipped with the Z-Wave logo produced by other companies. *Figure 1* shows a general view of the ARZ Z-Wave roller shutter with a description of the buttons and indicators. In the ARZ Z-Wave roller shutter the controlling module is located under the right-side body cover - see *Figure 1*.

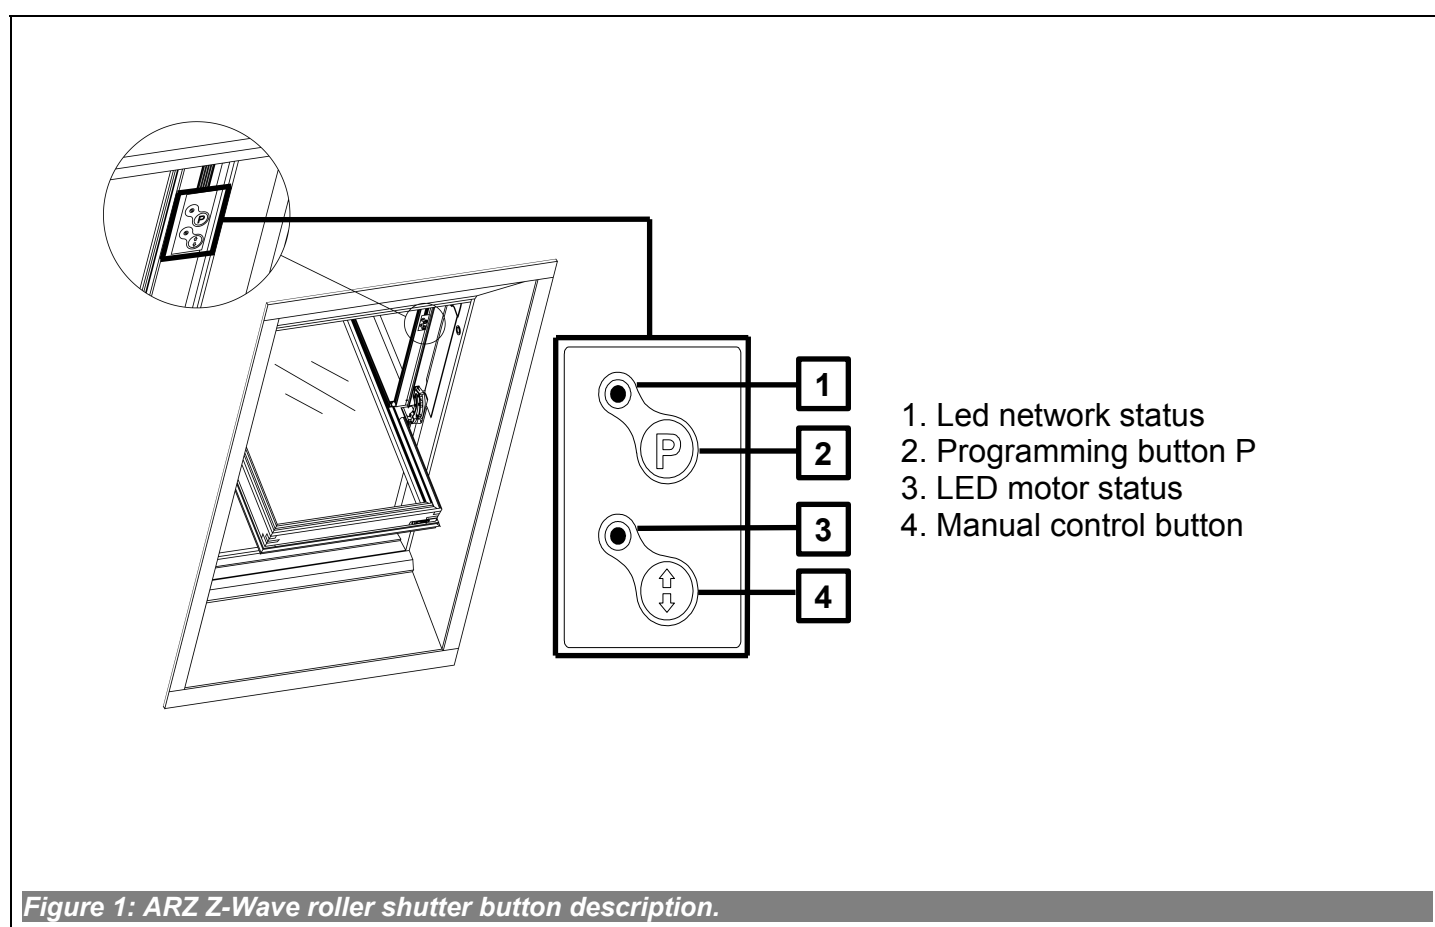

### 3. Programming the appliance.

In order for the appliance to communicate with the Z-Wave network, it is essential to connect to the network and give the appliance a special number (Node ID). The appliance can be added to a network, as long as it does not belong to another one. In order to add the appliance to a network, it should firstly be deleted from any network it belongs to, or restored to factory settings. This can be done with the use of any primary controller. The network status diode indicates when the appliance is ready to be linked to the network. This diode does not belong to any network.

In some cases (changing the location of an installation, or changing a damaged appliance), it is necessary to delete the appliance from the controllers' memory, as well as from the network in order to avoid errors and save the batteries of portable controllers.

**Do not physically remove the appliance until it has been deleted from the controller's memory. Improper usage can cause delays when trying to use the appliance and will cause the batteries of portable controllers to run out quickly.**

Function	Description	Led indication		
		Motor operating status	Z-Wave operating status	
<b>Autoinclusion &amp; Include (Add a new node)</b>	<b>Autoinclusion</b> - This feature allow you to add hard to reach devices to Z-Wave network. 3-times ON and OFF the power roller shutter (OFF-ON-OFF-ON-OFF-ON) causes the introduction of roller shutter to Autoinclusion mode. Please note that the procedure has been started the time between on and off can not exceed 20s. Autoinclusion mode is activated for a maximum of 10 minutes. During this time, we can add an awning to any Z-Wave controller running in the Include procedure.	-	flashing for up to 10 minutes	
	<b>Include</b> - This function allow you to add roller shutter to the network Z-Wave. Follow the procedur adding device to the network Z-Wave according to user manual supplied with the product. Then, press the programming button P on the roller shutter for 1 second.	-	Before: Light ON After: Light OFF	
<b>Association (Add node to group)</b>	<b>Associate</b> – function allow you to add roller shutter to the group of controller. Follow the procedur adding device to the selected group according to user manual supplied with the product. Then, press the programming button P on the roller shutter for the 1 second.	-	-	
<b>Exclude (Remove an existed node)</b>	<b>Exclude</b> - This function allow you to remove roller shutter from the network Z-Wave. Follow the procedur removing device from the network Z-Wave according to user manual supplied with the product. Then, press the programming button P on the roller shutter for 1 second. Function removes information only about newtork Z-Wave.	-	light	
<b>Delete (Remove node from group)</b>	<b>Delete</b> – function allow you to remove roller shutter from the group of controller. Follow the procedur removing device from the selected group according to user manual supplied with the product. Then, press the programming button P on the roller shutter for the 1 second.	-	-	
<b>Factory Default Reset</b>	<b>Device Reset Locally</b> – This function allows you to reset the Z-Wave network without the use of Z-Wave controller. Press 5 times the programming button P fast, the roller shutter was removed from the Z-Wave network, restore the default parameters, name and locations. Please use this procedure only when the network primary controller is missing or otherwise inoperable.	-	light	
	<b>Parameter Reset Locally</b> – Press fast 3 times P button on the roller shutter. Function removes information about parameters.	-	Flashing 5 times	
<b>Calibration</b>	<b>Manual</b> - Factory end positions roller shutter are calibrated. Calibration possible without necessity for prior recalibration of the device. It is performed using buttons available on the control panel of the ARZ Z-Wave roller shutter. Warning!!! For the proper calibration of the device requires two end positions set correctly.	1. Press P button and manual control button in the same time on the control panel.	Flashing...	-
		2. Press and hold manual control button until reach first end position.	Flashing...	-
		3. Press P button to confirm first end position.	Stop flashing and lit cointinously within 2 sec.	-
		4. Led motor status blinking again. Press and hold manual control button until reach second end position.	Flashing...	-
		5. Press P button to confirm second end position.	Stop blinking and lit cointinously within 2 sec.	-
	<b>Remote</b> – calibration possible after prior recalibration of the device. It is	1. Discalibrate device from controller – set parameter 12, value 2	Light	-

possible via gate (Gateway Z-Wave), remote control with a display, e.g. ZRS24 remote control (FAKRO).	2. Calibrate device from controller – set parameter 12, value 1	Flashing...	-
	3. Press UP button and hold it till reach first end position.	Flashing...	-
	4. Press STOP button to confirm first end position.	Stop flashing and lit continuously within 2 sec.	-
	5. Press DOWN button and hold it till reach second end position.	Flashing...	-
	6. Press STOP button to confirm second end position.	Stop blinking and lit continuously within 2 sec.	-

## 4. Association Groups.

There are three association groups in roller shutter ARZ Z-Wave:

1. Life Line – group for position reporting roller shutter after each a stoppage and alarm reporting (overcurrent, damage encoders). This group can be a maximum 1 device.
2. Basic Repeat – group used to transfer the received basic commands to the devices included in this group. This group can be a maximum 5 devices.
3. Multilevel Repeat – group used to transfer the received multilevel commands to the devices included in this group. This group can be a maximum 5 devices.

## 5. Compatibility of other producers' appliances in Z-Wave.

Z-Wave allows for the integration of other producers' appliances for lighting, heating, domestic automatic appliances, etc. The Z-Wave works in the network as a “repeater”, which enlarges the range of radio communication. The more appliances in the network, the more resistant to disordered activities in the network.

Launch the “INCLUDE” procedure with a controller of the existing network, and then press the “Programming button” located on the roller shutter which you want to link to the network.

**Attention: All information concerning “Include” and “Associate” options in other producers' controllers can be found in their user manuals.**

## 6. Z-Wave configuration parameters.

No.	Value	Default Value	Size	Description
12	1 2	1	1	Value 1 – calibrated Value 2 – discalibrated – to enter the calibration mode must first time discalibrate and then calibrate.
13	1 2	1	1	1 – FF go to Max 2 – FF go to previous position

## 7. Alarms and Notifications.

Notification type	Event
Power Management	Over-load detected
System	System hardware failure (encoders damaged)

## 8. Technical parameters

Technical parameters	
Power voltage	15V DC
Rated current	1,4 A
Speed	23 r.p.m
Temperature of usage	(-10°C) do (65°C)
Supplying cable	2 x 0,75 mm <sup>2</sup>

## 9. Command classes.

Command Classes	Role	
	Support	Control
Command Class Z-Wave+ Info v2	ok	
Command Class Basic v1	ok	ok
Command Class Version v2	ok	
Command Class Manufacturer Specific v2	ok	
Command Class Device Reset Locally v1	ok	
Command Class Association v2	ok	
Command Class Association Group Info v1	ok	
Command Class Powerlevel v1	ok	
Command Class Switch Binary v1	ok	
Command Class Switch Multilevel v3	ok	ok
Command Class Switch All v1	ok	
Command Class Configuration v1	ok	
Command Class Notification v3	ok	
Command Class Node Naming v1	ok	

## 10. Manufacturer Specific Report.

Manufacturer Specific Report	
Parameter	Value
Manufacturer ID	0x0085
Product Type ID	0x0003
Product ID	0x0011

## 11. Description of signals - light-emitting diode (LED)

Motor operating status (see figure no.1)		Z-Wave operating status (see figure no.1)	
<b>Singular blink of the diode</b>	The current received from the motor is too low.	<b>Continuous lighting of the diode</b>	The appliance does not belong to any network - remove control is impossible. This diode always appears when the appliance is connecting to a new motor. It disappears when the appliance is linked to any network using "INCLUDE" function.
<b>Triple blink of the diode</b>	The current received from the motor is too intensive. A calibration of the roller shutter motor should be checked. A description of outskirts regulation is described in point A of the roller shutter installation.		

---

## 12. Warranty

The producer guarantees a high quality of the appliance. It pledges to repair or replace damage element, if the damage is caused by defective materials or construction. The warranty is valid within 24 months from the date of selling due to the following conditions:

- The installation process was proceeded by qualified and authorized person according to the producer requirements.
- The seals were not affected and there were not introduced any changes in construction.
- The appliance was used according to its purpose and in comply with user manual.
- Damage is not an effect of improper power supply installation or an atmospheric conditions.
- The producer is not responsible for any damages arising of improper using and for mechanic damages.

In case of a damage the appliance should be delivered along with the Warranty Card. During the warranty period all damages and defections are recovered for free within 15 labour-days. Warranty and after-warranty repairs are made by the producer FAKRO Ltd.

Quality certificate:

Appliance

Model.....

Serial Number.....

Saleperson.....

Address.....

Date of purchase.....

.....

Signature (stamp) of installing person